

LightingWise®




STRIP LIGHT

DESCRIPTION

CATALOG	ELECTRONIC BALLAST	LAMP TYPE	NO. OF LAMPS
DL248	DXE2M8	32WT8	2

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	FREQUENCY
120V	0.5A	32W	60HZ

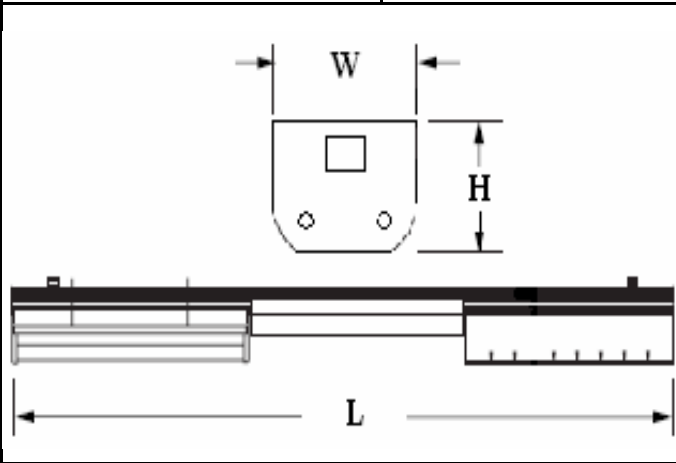

PHYSICAL DIMENSIONS

UNITS	M	L	W	H
INCHES	44.81"	49.04"	3.91"	2.45"
TOL (+/-)	0.05	0.05	0.05	0.05

CARTON DIMENSIONS

UNITS	M	L	H
INCHES	52.19"	4.01"	2.52"
TOL (+/-)	0.05	0.05	0.05

FEATURES

- Small profile allows inconspicuous placement in confined spaces.
- Uniform, glare free illumination provided on task.
- Housing keyhole slots and K.O.'s provide quick and easy installation.
- Individual or continuous row mounting.
- All welded construction provides long lasting performance.
- All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit rusting.

SPECIFICATIONS

- HOUSING-20 Ga. Die formed, welded C.R.S.
- SHIELDING-high impact, extruded white opal acrylic diffuser.
- FINISH-white powder coating with 5-stage iron/phosphate prepared metal. 92% minimum average reflectance.
- ELECTRICAL-ballast with Repid Start & cool weather start.
- LABELS-UL listed as fluorescent fixture suitable for damp locations. CUL listing for Canada available-consult factory.
- MOUNTING-surface.

PRODUCT PHOTO

