


## STRIP LIGHT

### DESCRIPTION

CATALOG	ELECTRONIC BALLAST	LAMP TYPE	NO. OF LAMPS
DL724	DXE118M8	18WT8	1

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	FREQUENCY
120V	0.27A	17.5W	60HZ

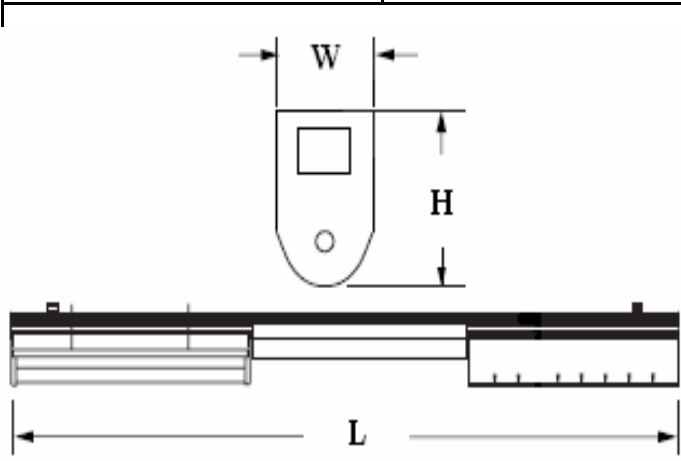

### PHYSICAL DIMENSIONS

UNITS	M	L	W	H
INCHES	20.83"	25.04"	1.41"	2.47"
TOL(+/-)	0.05	0.05	0.05	0.05

### CARTON DIMENSIONS

UNITS	L	W	H
INCHES	27"	4.92"	1.65"
TOL(+/-)	0.05	0.05	0.05

### FEATURES

- Small profile allows inconspicuous placement in confined spaces.
- Uniform, glare free illumination provided on task.
- Housing keyhole slots and K.O.'s provide quick and easy installation.
- Individual or continuous row mounting.
- All welded construction provides long lasting performance.
- All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit rusting.

### SPECIFICATIONS

- HOUSING-20 Ga. Die formed, welded C.R.S.
- SHIELDING-high impact, extruded white opal acrylic diffuser.
- FINISH-white powder coating with 5-stage iron/phosphate prepared metal. 92% minimum average reflectance.
- ELECTRICAL-ballast with Repid Start & cool weather start.
- LABELS-UL listed as fluorescent fixture suitable for damp locations. CUL listing for Canada available-consult factory.
- MOUNTING-surface.

### PRODUCT PHOTO

